



Photovoltaics is our passion

ET MODULE

ET-P654215	215Wp	ET-P654195	195Wp
ET-P654210	210Wp	ET-P654190	190Wp
ET-P654205	205Wp	ET-P654185	185Wp
ET-P654200	200Wp	ET-P654180	180Wp

EFFICIENCY

- Low voltage-temperature coefficient allows higher power output at high-temperature condition
- High efficient, high reliable solar cells ensure our product output stability

MATERIALS

- Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- The sturdy, anodized aluminum frame allows the modules to be mounted on a variety of standard racking systems and to withstand harshest conditions
- Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- Innovative, environmentally friendly packing method using pile-edges ensures modules arrive in perfect condition
- New frame design incorporating hexagonal shaped drainage holes, with more grounding holes, provide flexible installation and use

BENEFITS

- Manufactured in an ISO 9001:2000 certified plant
- High efficiency, high safety, high reliability
- Output power tolerance of +/-3%
- 25-year limited warranty on power output, 5-year limited warranty on materials and workmanship



IEC 61215 Ed.2

IEC 61730

UL 1703



ET SOLAR GROUP www.etsolar.com

ET Solar China

24F, A2 World Trade Center Mansion,
67 Shanxi RD, Nanjing 210009, China
Tel: +86 25 8689 8096 Fax: +86 25 8689 8097
Email: sales@etsolar.com

ET Solar USA

4900 Hopyard Road, Suite 290,
Pleasanton, CA 94588, USA
Tel: +1 925 460 9898 Fax: +1 925 460 9929
Email: sales@etsolar.us

ET Solar Europe

ET Solar GmbH, Munich City Tower,
Landsbergerstr. 110 / 9 Fl. D-80339 Munich, Germany
Tel: +49 89 309040 263 Fax: +49 89 309040 466
Email: sales@etsolar.de
(Italy Office) Tel: +39 392 2340606 Email: sales@etsolar.it

ET Module


ET-P654215 ET-P654210 ET-P654205 ET-P654200
 ET-P654195 ET-P654190 ET-P654185 ET-P654180

SPECIFICATIONS

Model type	ET-P654215	ET-P654210	ET-P654205	ET-P654200	ET-P654195	ET-P654190	ET-P654185	ET-P654180
Peak power (Pmax)	215W	210W	205W	200W	195W	190W	185W	180W
Cell type	PolyCrystalline Silicon, 156mm x 156mm							
Number of cells	54 cells in series							
Weight	17.8 kg (39.3 lbs)							
Dimensions	1482×992×50 mm (58.35×39.06×1.97 inch)							
Maximum power voltage (Vmp)	27.54V	27.54V	27.30V	27.21V	27.00V	26.78V	26.45V	26.45V
Maximum power current (Imp)	7.81A	7.63A	7.50A	7.36A	7.22A	7.10A	6.99A	6.81A
Open circuit voltage (Voc)	33.20V	32.83V	32.80V	32.72V	32.75V	32.50V	32.30V	32.35V
Short circuit current (Isc)	8.50A	8.30A	8.10A	7.86A	7.98A	7.72A	7.70A	7.60A
Maximum system voltage	DC 1000V							
Temp. Coeff. of Isc (TK Isc)	0.065 %/°C							
Temp. Coeff. of Voc (TK Voc)	-0.346 %/°C							
Temp. Coeff. of Pmax	-0.488 %/°C							
Normal Operating Cell Temperature	45.3±2°C							


Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25 °C.

PHYSICAL CHARACTERISTICS Unit:mm (inch)

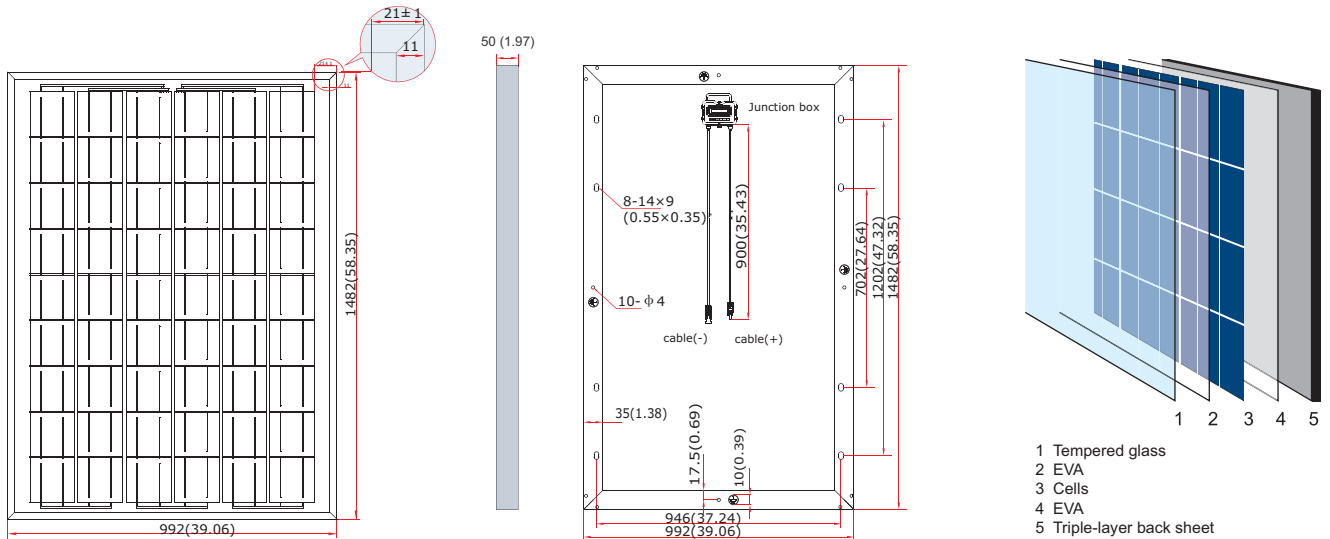


ELECTRICAL CHARACTERISTICS


Electrical performance
(cell temperature: 25°C)

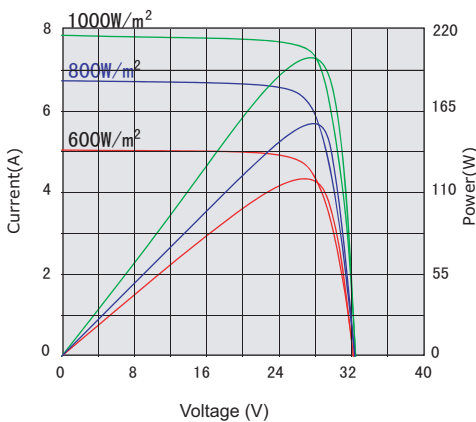

Temperature dependence of Isc, Voc and Pmax

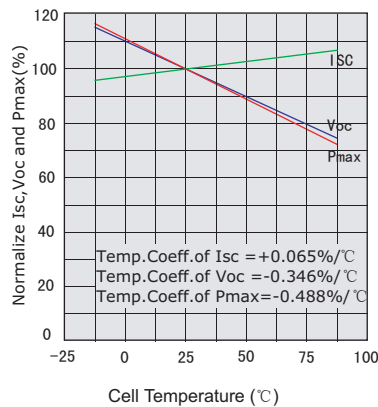

Irradiance dependence of Isc, Voc and Pmax (cell temperature: 25°C)

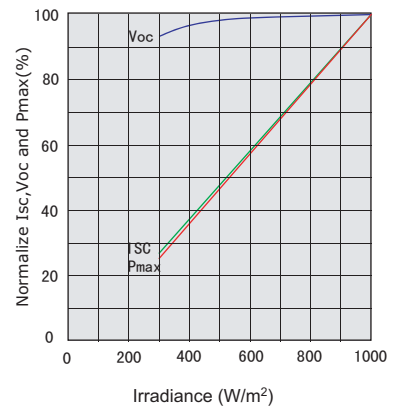

Please contact support@etsolar.com for technical support.